


# Appliqué in Reverse

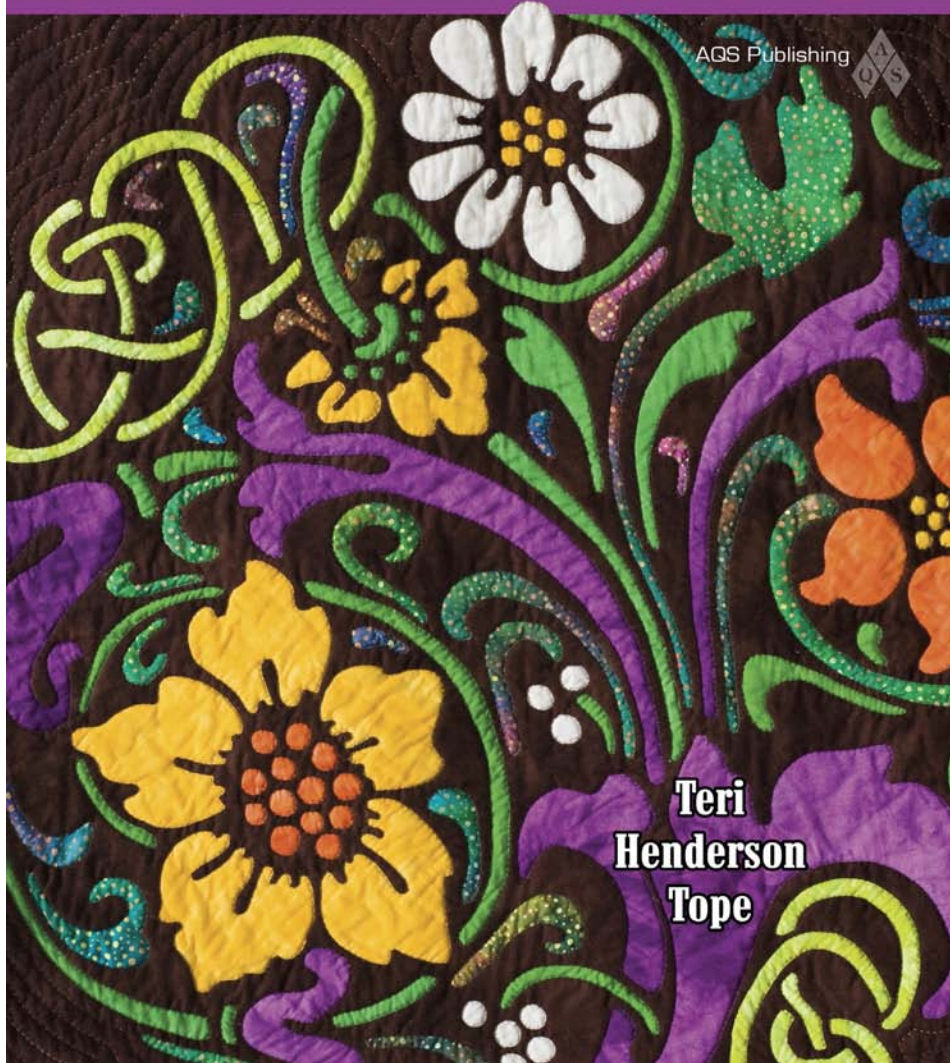

## ERRATA

**Important information for changes to first printing of publication.**

The following pages replace pages 19 and 21. An incorrect measurement was given on each page in the original printing.

## Cutting Instructions

*Note:* See the Cutting, Trimming, and Layout diagram on page 20.

### From background fabric cut:

- One 57½" x 10½" rectangle for ivy appliqué block
- Thirteen 15" x 15" squares for floral appliqué blocks
- Sixteen 4½" x 4½" square blocks for trellis border
- Six 3½" strips selvage to selvage for trellis border:
  - Two 18" long
  - Six 7½" long
  - Eight 15" long

Five 19" squares for setting triangles:

- Cut 4 in half (corner to corner) (Figure 2)
- Cut one crosswise into 4 corner pieces (Figure 3)
- Seven 1½" strips selvage to selvage for outer border (piece as necessary)
- Seven 2½" strips selvage to selvage for double-fold binding

### From light brown cut:

Nine 1" strips selvage to selvage

### From dark brown cut:

Nine 1" strips selvage to selvage

## Quilt Center Construction

### *Note:*

*All seams are sewn with ¼" seam allowance. We will have no repeats of Teri's first quilt!*

Prepare and appliqué the 57½" x 10½" ivy header strip and the thirteen 15" x 15" floral blocks from the patterns on pages 24–53. Trim the ivy strip to 54" x 10½".



Figure 2




Figure 3



Start the appliqué for each block with whatever color floats your boat. Trim the completed floral blocks to 13" squares.

On a large flat surface or design wall, lay out the thirteen floral blocks in a pleasing manner. Place the corner and setting triangles on a surface as directed in the layout diagram. Sew the blocks and setting triangles together in diagonal strips. Press seams according to the arrows in the diagram. (Figure 4)

Sew the rows together, trimming the setting triangles as needed. Press the top.

Sew the appliquéd ivy rectangle to the top of the quilt. Press the seam toward the rectangle. (Figure 5)



Figure 4. Arrows indicate direction for seam to be pressed.



Figure 5

### Trellis Border Construction

To create the trellis strips, sew one dark brown and one light brown strip to both long sides of each of the six 3½" background strips. Press the seams to the background strips. Trim the strips according to the Cutting, Trimming, and Layout diagram on page 20—six 7½" strips, two 18" strips, and eight 15" strips. (Figure 6)



Figure 6